



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

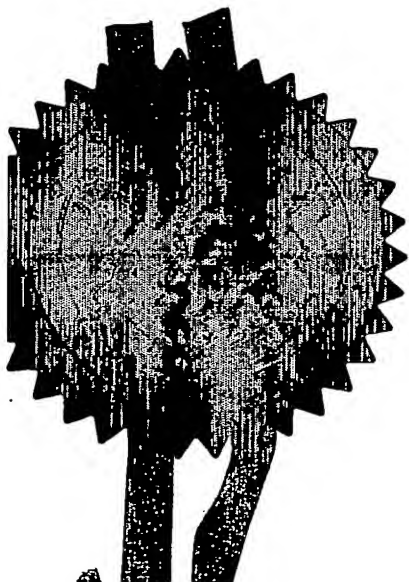


Signed *William Morell*

Dated 18 February 2005

Patents Form 1/77

Patents Act 1977
(Rule 16)

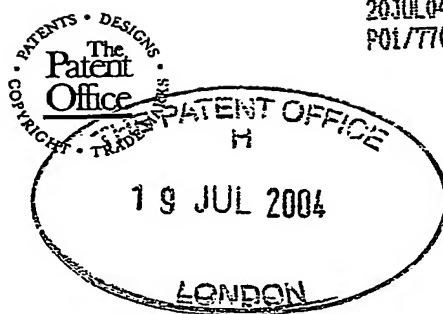

20JUL04 E912341-4 002820
P01/7700 0.00-0416096.6 CHEQUE

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference P5067GB 19 JUL 2004

2. Patent application number
(The Patent Office will fill this part in) 0416096.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

THE CANNY COMPANY LIMITED
Highfields House
Worleston
Cheshire
CW5 6DU

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UK

8762452002

4. Title of the invention RESTRAINT DEVICE FOR ANIMALS

5. Name of your agent (if you have one)

HLBBshaw
10th Floor Metropolitan House
1 Hagley Road
Edgbaston
BIRMINGHAM B16 8TG
ADP - 09007014001

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it) 13623001

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.	Country	Priority application number (if you know it)	Date of filing (day / month / year)
---	---------	---	--

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)	Number of earlier UK application	Date of filing (day / month / year)
--	----------------------------------	--

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Yes

Otherwise answer NO (See note d)

Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description

7 —

Claim(s)

2 —

Abstract

Drawing(s)

3 + 3 June

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for a preliminary examination and search (Patents Form 9/77)

1 —

Request for a substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

Laurence Shaw & Associates
Laurence Shaw & Associates

Date

19 July 2004

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

Dr. Christopher Moore

0121 454 4962

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

DUPLICATE

Agent's Ref: P05067GB

RESTRAINT DEVICE FOR ANIMALS

- 5 The invention relates to a restraint device for animals and in particular a collar for dogs incorporating means for restraining the dog from pulling, biting or barking.

Our British patent application published under no. GB 2385506 entitled "A Dog Collar" discloses a restraint which comprises a slip line which extends through four D-rings
10 mounted on a collar. The slip line also extends through a figure-of-eight ring arranged to be located below the dog's muzzle, the slip line being able to encircle the dog's muzzle to thereby provide a 'controlling' action, in use.

One potential drawback which has been noted with our above-identified patent
15 application is that when the dog is taken off the lead, it is necessary to remove the restraint because the slip line encircling the dog's muzzle can be pawed off and then trails from the neck of the animal, providing a potential choke hazard for the animal and/or a trip-hazard for others or a risk of damage to other property.

20 It is thought that all other similar 'headcollar' type training devices and restraints must be removed from the animal once the animal has been taken off the lead. Reference is made to GB 2215973, EP 0199477 and US 4964369 which must all be removed subsequent to use, or else provide the potential for damage to property or to the animal through trailing or loose parts.

25

It is clear that there is a potential benefit in not having to remove the collar each time that an animal is taken off of the lead. This will be particularly felt when there are a large

number of animals to be walked, for example, in an animal shelter, although the benefit will also be felt with an individual animal.

Accordingly, it is an object of this invention to provide a restraint which has all the
5 benefits of our earlier patent application but which need not be removed from the animal once the animal has been removed from the lead.

A first aspect of the invention provides a restraint device for an animal, the device comprising a neck collar for the animal having inter-engagable ends, a surface of the
10 collar having longitudinally spaced apart lead guide means mounted on either side of the longitudinal centre of the collar; a lead passing through said lead guide means and having stop means at each end to which a leash is attachable; slider means mounted on the lead, located between said guide means and arranged to allow a portion of the lead to assume a generally noose-like shape to encompass the nose and mouth region of the
15 animal, wherein the lead comprises securing means at or towards either end thereof, arranged to be secured or secureable together or secured or secureable to said guide means once the leash has been removed from said stop means.

Preferably, said guide means are arranged as two outer guide means which are
20 engagable with said stop means and two inner guide means which are located one on each side of the longitudinal centre of the collar, said securing means preferably being secureable to said inner guide means.

Preferably, the lead is longer than the collar, in the range of, for example, from about 2.5
25 to 1.5 times the length.

Preferably, said securing means comprise sprung clips, say sprung metal or plastics clips. Said securing means may comprise mutually engagable hook-and-eye fasteners. Said securing means may comprise fabric mutually engagable hook-and-eye fixings (e.g. Velcro®) which may be secured (e.g. sewn) to the ends of the lead.

5

Preferably, said securing means are secured together underneath the animals mouth and nose region, in which case the lead will or is able to encircle the animals neck twice.

10

By the term engaged collar we mean the length of the collar when the two ends are engaged; e.g. a female clasp engages an eyelet at a male end of the collar appropriate to the animal.

15

By the term slider means we mean a device which guides and allows relatively free movement of the lead under the nose and mouth region (e.g. the muzzle) of the animal. It is a preferred feature of the invention that the slider (and any other part likely to contact the fur or skin of the animal) is made of a material which will not cause an allergic reaction in the animal; the use of certain metals e.g. nickel is preferably avoided. Preferably, the slider is a so called TRIGLIDE (PL 103) which has two sockets and is formed of plastics such as an acetal.

20

Preferably, the stop means at the ends of the lead define means for engagement with a leash.

25

A second aspect of the invention provides an animal restraint device comprising a collar arranged to be secured about the animal's neck and lead means retained on the collar and having a portion arranged to encompass the animal's muzzle, in use; said lead

means having two ends to which a leash is securable, the ends of said lead means being securable together or to the collar when not secured to a leash.

In order that the invention may be well understood it will now be described by way of
 5 example only with reference to the accompanying diagrammatic drawings in which:

Figure 1 is a plan view of the parts of a restraint device according to the invention before use;

Figure 2 is a plan view of the restraint device of Figure 1, showing the parts
 10 together, ready for use;

Figure 3 is a perspective view of the device of Figure 1 configured for non-restraint use; and

Figure 4 is a perspective view of the device of Figure 1 configured for a second embodiment of non-restraint use.

15

Referring to Figures 1 and 2, the device 1 comprises a collar 2 which is a length of strong textile material or webbing or leather having at one end a metal buckle or clasp 3 and at the other, four eyelet protected holes E1 to E4, which can receive the pin 3a of the buckle 3. The collar 2 is intended to be placed about the neck of an animal such as
 20 a dog. The eyelets are preferably reinforced by a metal which is not hazardous to the animal e.g. nickel is preferably avoided.

Two pairs of loops are fixed to a surface of the collar 1, e.g. by stitching to act as lead guide means. The inner pair L1, L2 are located about 2.54 cm apart on each side of the
 25 longitudinal centre of the collar 2. The outer pair of loops L3, L4 are spaced an equal distance away from the longitudinal centre of the collar 2. The loops act as lead guide means for a lead or strap 4 which, in use, runs through each of the loops L1-L4. The

loops L1 to L4 are made of a metal which will not cause an allergic reaction. The lead 4 is narrower than the collar 2 and is also made of strong textile material or webbing.

At each end the lead 4 has a metal D-ring D1, D2 each dimensioned so that it cannot pass through the loop L3, L4 respectively. In this way, the lead 4 is held to the collar 2. The length of the lead 4 is selected so that the distance X between eyelet E1 and the end of the collar 2 at the buckle end of the collar is half the length 2X of the webbing of the lead 4. A slider 10 is present at about the longitudinal midpoint of the strap, that is, in use, between the loops L1, L2. The slider 10 is a figure-of-eight provided with two passages at sockets 11, 12 through which the lead 4 passes. The slider 10 has no sharp parts and is made of plastics such as acetal which has a friction surface; preferably the slider is a TRIGLIDE, preferably a model in the PL 103 range. A sprung metal clip C1, C2 is connected to each D-ring D1, D2 of the lead 4. Each clip C1, C2 is split to provide an occluded opening which is closed by the walls of the clip C1, C2 being resiliently urged into close proximity.

In use, the collar 2 is placed about the neck of a dog and the buckle 3 engaged with an appropriate eyelet-protected hole E1-E4 (the engagement being between the pin 3a and eyelet-protected hole E1 in Figure 2. The length of lead 4 between the loops L1, L2 is pulled to define a loose noose N and this is placed over the dog's muzzle or nose area to define a restraint which can prevent the dog from opening its mouth to bite or bark. The noose N is tightened by pulling on the ends of the lead 3 but without subjecting the dog to pain. The slider 10 lies beneath the chin of the animal and may contact its fur or skin. Because the slider has no sharp parts the fur is not caught or torn. Because it is made of plastics material there is no risk of a skin reaction especially when the dog lowers its head. A leash (not shown) is clipped to the two D rings, D1, D2. If the dog pulls on the lead 4 pressure is applied evenly to the muzzle of the dog, giving control of the animal.

Dogs vary much in size and shape; if a collar 2 is too tight or too loose the device will not work satisfactorily. It is a preferred feature of this invention that the devices are produced in a range of sizes selected so that a good fit will always be available. It is a feature of the invention that each collar is provided with four eyelets E1, E2, E3, E4, and the innermost eyelet E4 of one collar size is the same distance from the buckle 3 as the outermost eyelet E1 of the next collar of shorter length. Such a method of dimensioning the collars ensures that there should always be one which fits a dog.

Referring to Figures 3 and 4, there is shown the device 1 of the invention configured as it would be when not in use to walk or restrain the animal. In Figure 3, the lead 4 is wrapped around the collar 2 so that the lead substantially encompasses the collar 2 twice, the D-rings D1, D2 being brought into close proximity and the clips C1, C2 being connected together. It will be appreciated that the pin 3a of the buckle 3 engages eyelet-protected hole E3. No parts of the device 1 hang from the collar 2, thereby ensuring that an animal to which the device 1 was secured could not choke subsequent to a hanging part becoming caught (or at least reducing the chance of such an incident occurring). In Figure 4, again the lead 4 substantially encompasses the collar 2 twice but this time the clips C1, C2 are secured to loops L2 and L1 respectively. It will be appreciated that the pin 3a of buckle 3 engages eyelet-protected hole E1 of the collar 2.

Of course, if the lead 4 were longer, it could extend further than twice around the collar 2 and it could extend less than twice around the collar 2 if it were substantially shorter. In which cases, the clips C1, C2 could be attached to loops L3 and/or L4.

The clips C1, C2 could be replaced with any suitable securing means. It is preferable that the securing means can attach to itself as well as to the collar 2. Fabric hook-and-

eye fasteners (e.g. Velcro®) could be used. In which case the fabric could or would be sewn to the ends of the lead 4, inboard of rings D1 and D2. If it were intended to connect the Velcro® to the collar 2, only one part of the Velcro® need be sewn to each end, for example the hook part as it would adhere to the webbing sufficiently to stay in place.

- 5 This would also have the advantage that the two ends of the lead 4 would not become secured together during walking or restraint of the animal.

It will be appreciated that once the animal has returned from a walk where it has been humanely restrained using the device 1, it is not necessary to remove the device 1 from
10 the animal. The leash (not shown) is unclipped from the D-rings D1, D2, the noose N is removed from the animal's muzzle and the lead 4 pulled through the loops L1 to L4. The lead 4 is then wrapped around the animal's neck and the clips C1, C2 are secured together or are secured to the loops L1 to L4 (as appropriate), leaving little or none of the lead 4 dangling to provide a choke hazard for the animal or a trip hazard for any other
15 animal or person.

Once the animal is ready to be walked again, the steps are reversed to provide a restraint device 1 which humanely restrains the animal.

- 20 The invention has been described in relation to dogs but the device is also applicable to other animals, large or small, domesticated or exotic. The collar and lead may be made in a variety of materials and the methods of holding them together may be varied.

CLAIMS

1. A restraint device for an animal, the device comprising a neck collar for the animal having inter-engagable ends, a surface of the collar having longitudinally spaced apart lead guide means mounted on either side of the longitudinal centre of the collar; a lead passing through said lead guide means and having stop means at each end to which a leash is attachable; slider means mounted on the lead, located between said guide means and arranged to allow a portion of the lead to assume a generally noose-like shape to encompass the nose and mouth region of the animal, wherein the lead comprises securing means at or towards either end thereof, arranged to be secured or secureable together, or to a part of the device, once the leash has been removed from said stop means.
2. A device according to Claim 1, wherein said guide means are arranged as two outer guide means which are engagable with said stop means and two inner guide means which are located one on each side of the longitudinal centre of the collar.
3. A device according to Claim 2, wherein said securing means are secureable to said inner guide means.
4. A device according to any preceding Claim, wherein said securing means are securable to one another.
5. A device according to any preceding Claim, wherein said securing means are securable to the collar.

6. A device according to any preceding Claim, wherein the lead is from about 2.5 to 1.5 times longer than the collar.

7. A device according to any preceding Claim, wherein said securing means
5 comprise sprung clips, say sprung metal or plastics clips.

8. A device according to any of Claims 1 to 6, wherein said securing means
comprise mutually engagable hook-and-eye fasteners.

10 9. A device according to any of Claims 1 to 6, wherein said securing means
comprise fabric mutually engagable hook-and-eye fixings, secured (e.g. sewn) to
the ends of the lead.

10. A device according to any preceding Claim, wherein said securing means are
15 securable together underneath the animals mouth and nose region.

11. A device according to any preceding Claim, wherein said slider means is made of
a material which does not cause an allergic reaction in the animal to which the
device is to be attached.

20 12. An animal restraint device comprising a collar arranged to be secured about an
animal's neck and lead means retained on the collar and having a portion
arranged to encompass the animal's muzzle, in use; said lead means having two
ends to which a leash is securable, the ends of said lead means being securable
25 together or to the collar when not secured to a leash..




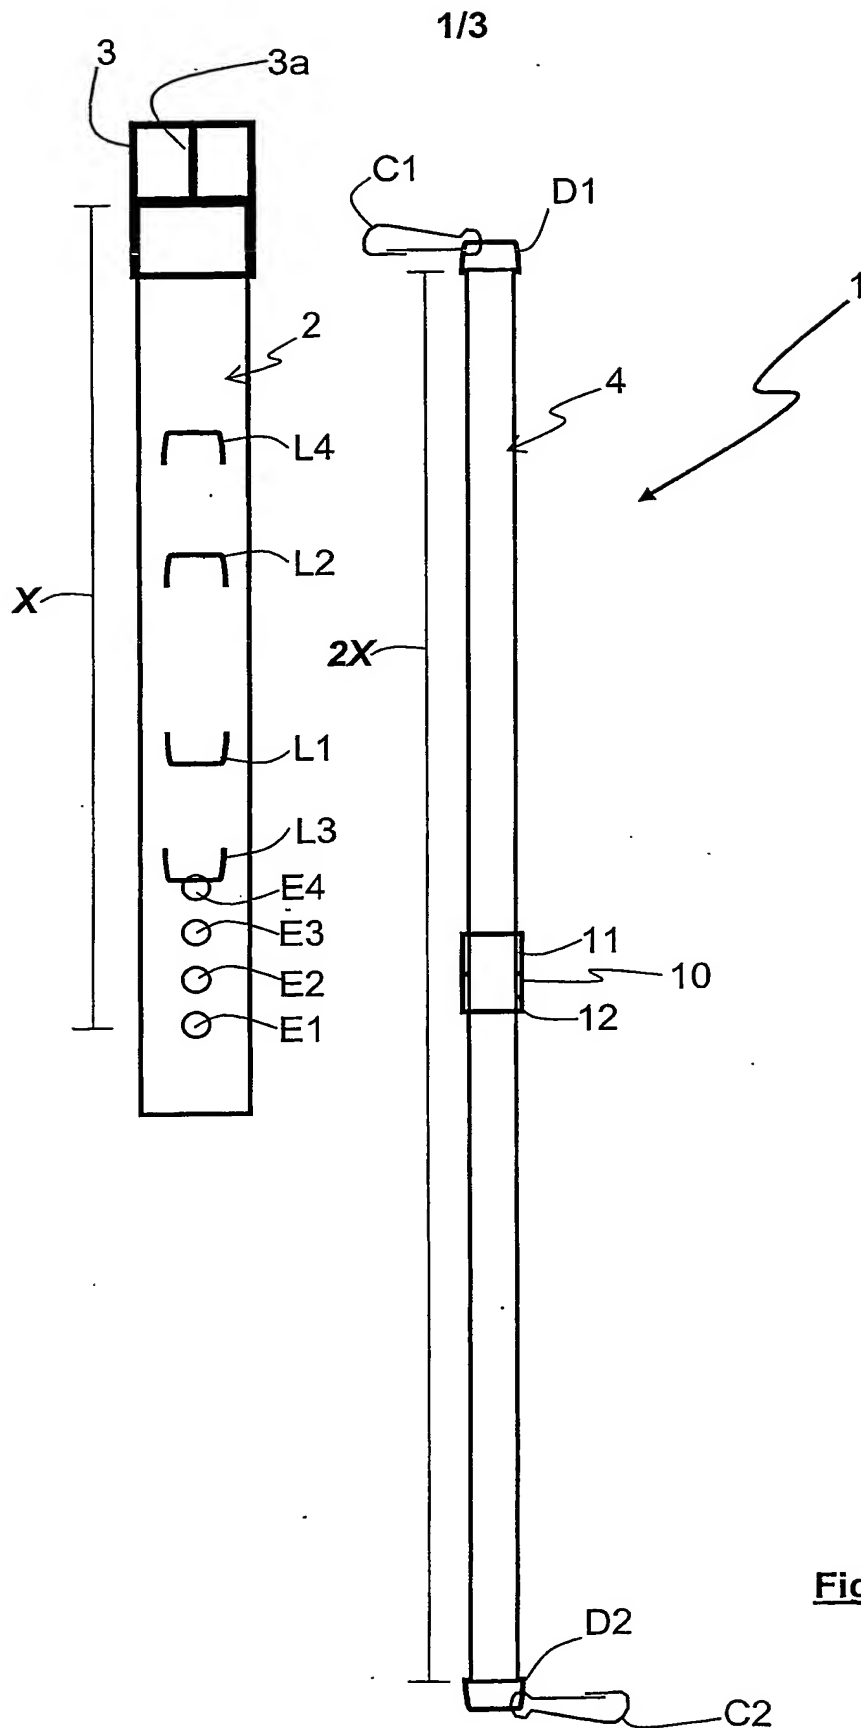


Figure 1

**Figure 2**

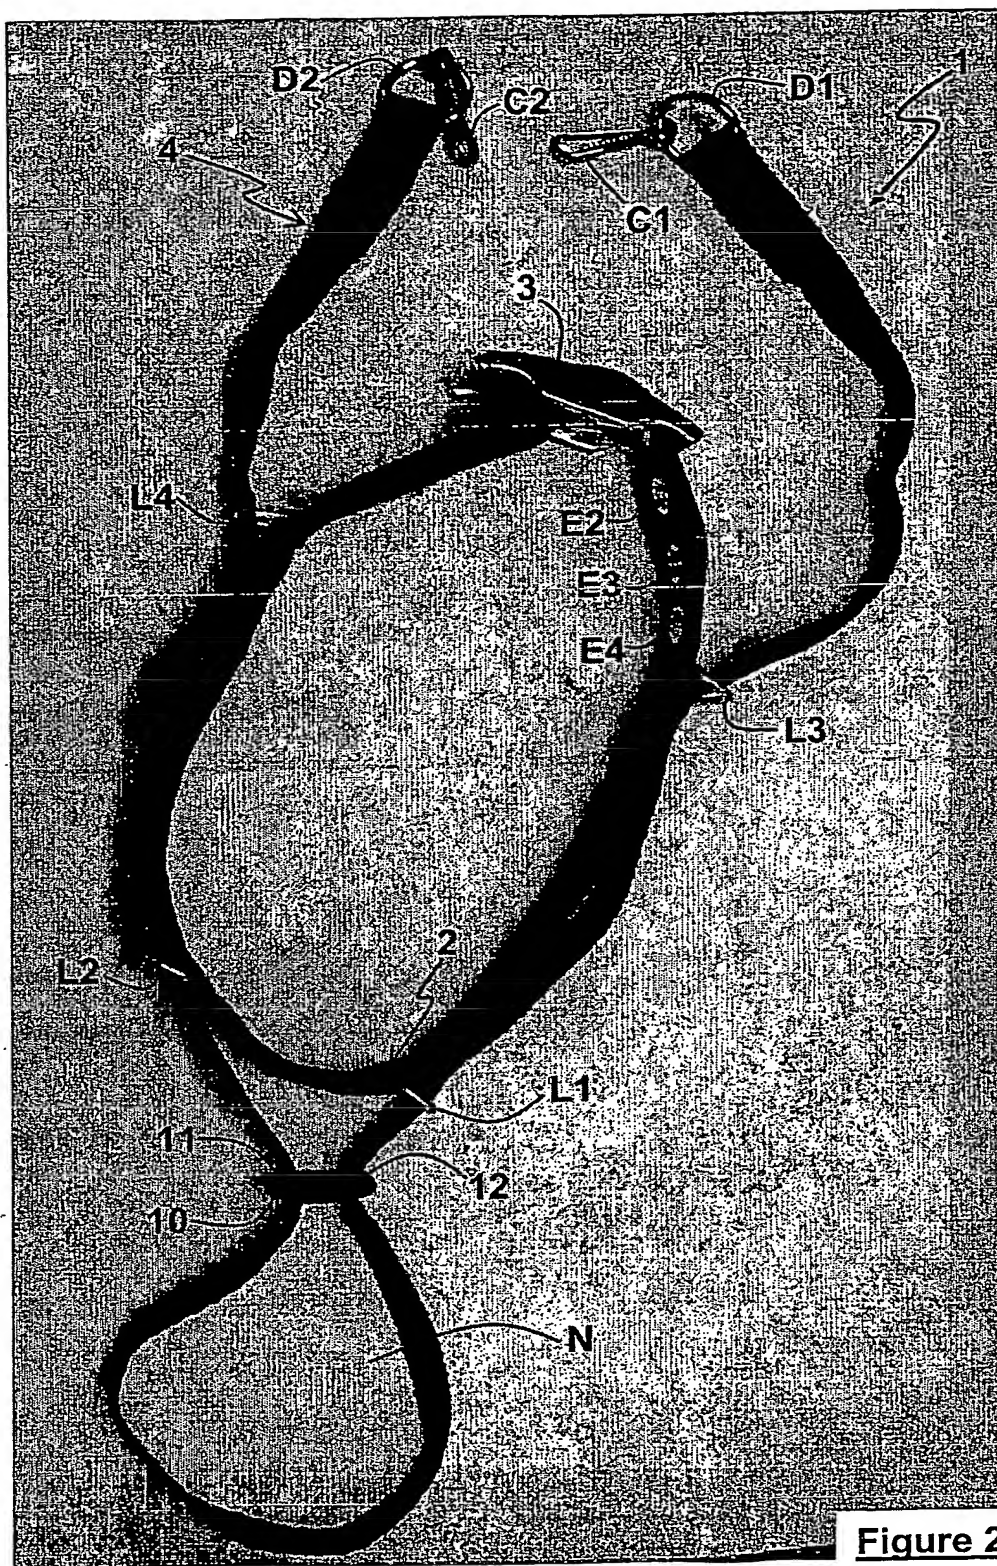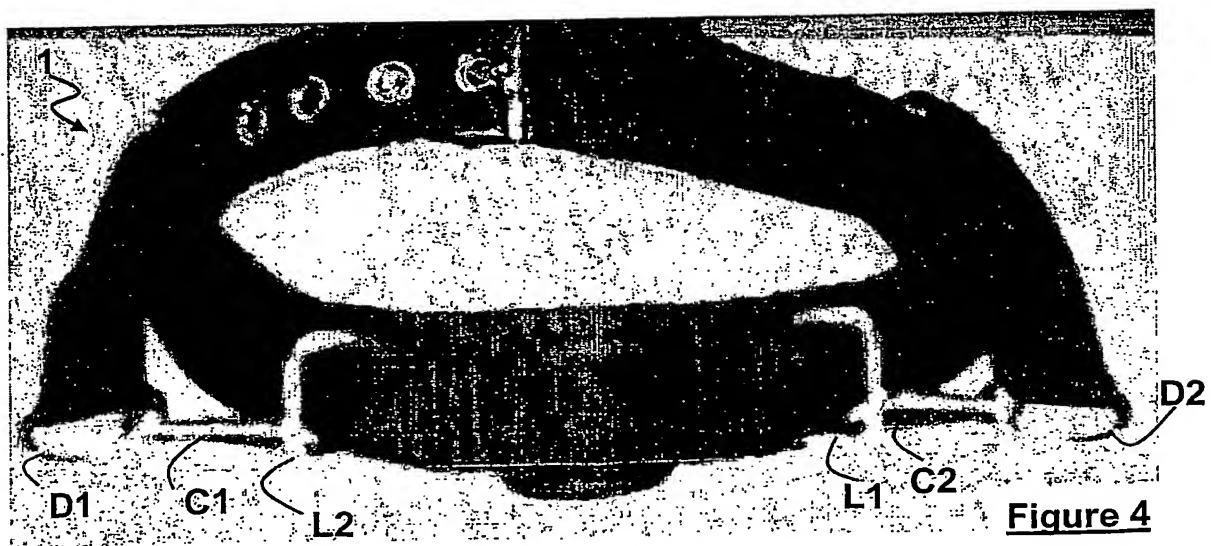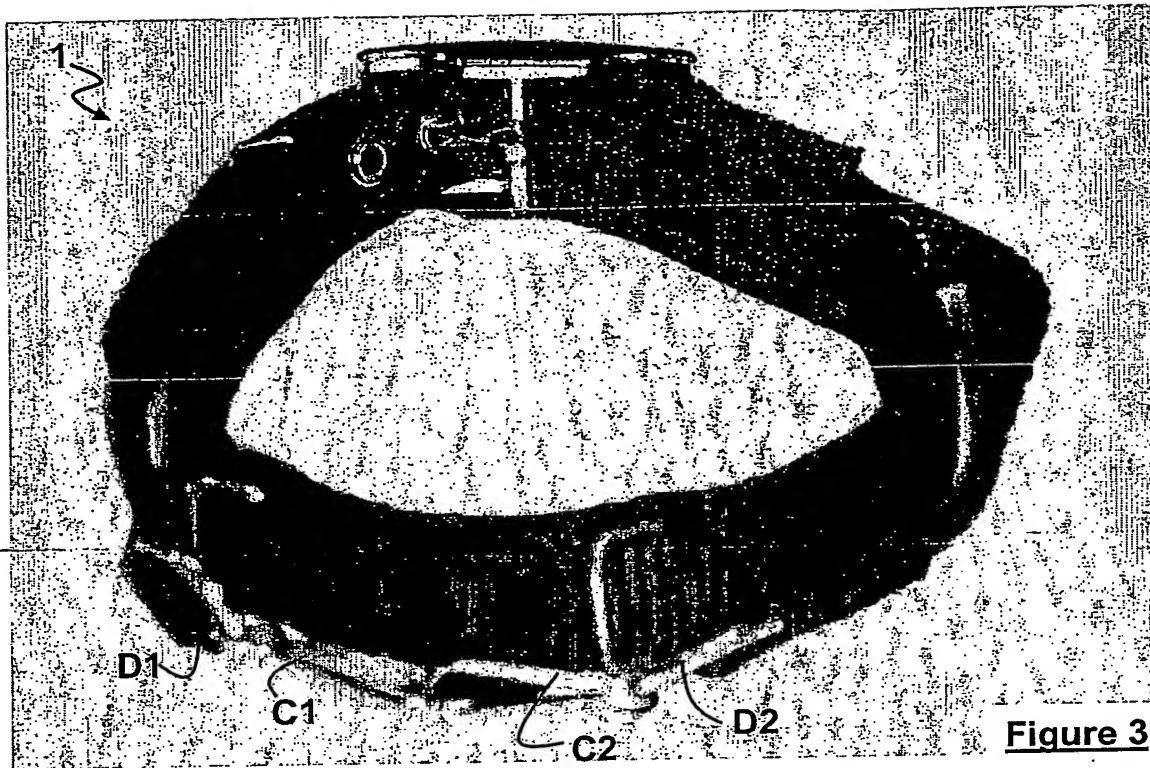

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000088

International filing date: 13 January 2005 (13.01.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0416096.6
Filing date: 19 July 2004 (19.07.2004)

Date of receipt at the International Bureau: 02 March 2005 (02.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.